

Foret queue cône morse DIN345

Taper shank twist drill DIN345

Spiralbohrer mit Morsekegel DIN345

Broca mango cónico DIN345

Référence / Code

13CO


DIN 345

Nuance Material	Co5%
Type	Meulé Fully ground
Aspect Surface	Blanc White
Hélice Helix	Normale
Goujure Flute	Normale
Angle pointe Point angle	118°
Affûtage Point shapes	Standard


Recommandé pour :

Suitable for :

- ◆ Acier / Steel
- ◆ Acier dur / Hard steel
- ◆ Aluminium
- ◆ Inox / Stainless steel
- ◆ Fonte / Cast iron

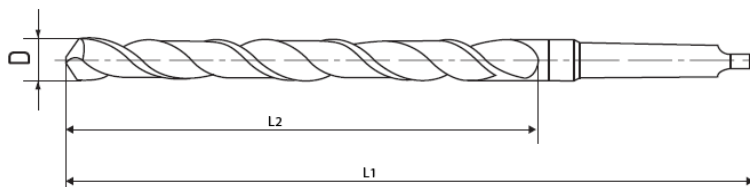

Co5%



Type A
 $\phi > 14$

Ø mm	L1 mm	L2 mm	CM MK
10	168	87	1
10,5	168	87	1
11	175	94	1
11,5	175	94	1
12	182	101	1
12,5	182	101	1
13	182	101	1
13,5	189	108	1
14	189	108	1
14,5	212	114	2
15	212	114	2
15,5	218	120	2
16	218	120	2
16,5	223	125	2
17	223	125	2
17,5	228	130	2
18	228	130	2
18,5	233	135	2

Ø mm	L1 mm	L2 mm	CM MK
19	233	135	2
19,5	238	140	2
20	238	140	2
20,5	243	145	2
21	243	145	2
21,5	248	150	2
22	248	150	2
22,5	253	155	2
23	253	155	2
23,5	276	155	3
24	281	160	3
24,5	281	160	3
25	281	160	3
25,5	286	165	3
26	286	165	3
26,5	286	165	3
27	291	170	3
27,5	291	170	3

Ø mm	L1 mm	L2 mm	CM MK
28	291	170	3
28,5	296	175	3
29	296	175	3
29,5	296	175	3
30	296	175	3
30,5	301	180	3
31	301	180	3
31,5	301	180	3
32	334	185	4
32,5	334	185	4
33	334	185	4
34	339	190	4
35	339	190	4
36	344	195	4
37	344	195	4
38	349	200	4
39	349	200	4
40	349	200	4

Unité de conditionnement : unitaire.

Unit packet : unitary.

Foret queue cône morse pour HARDOX

Taper shank twist drill

Spiralbohrer mit Morsekegel


Broca mango cónico

Référence / Code

13HAR

USINE

Nuance Material	Co8%
Type	Meulé Fully ground
Aspect Surface	Noir Black
Hélice Helix	15°
Goujure Flute	Normale
Angle pointe Point angle	130°
Affûtage Point shapes	Spécial

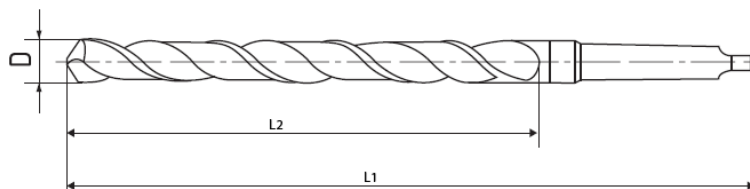

Co8%

Ø mm	L1 mm	L2 mm	CM MK
10	190	90	2
11	190	90	2
12	190	90	2
13	190	90	2
14	190	90	2
15	190	90	2
16	190	90	2
17	190	90	2
18	190	90	2
19	225	105	2

Ø mm	L1 mm	L2 mm	CM MK
20	225	105	3
21	225	105	3
22	225	105	3
23	225	105	3
24	225	105	3
25	225	105	3
26	225	105	3
27	265	120	4
28	265	120	4
29	265	120	4

Ø mm	L1 mm	L2 mm	CM MK
30	265	120	4

Recommandé pour :

Suitable for :

- Acier / Steel
- Acier dur / Hard steel
- Aluminium
- HARDOX - CREUSABRO